


Raychem T2RED

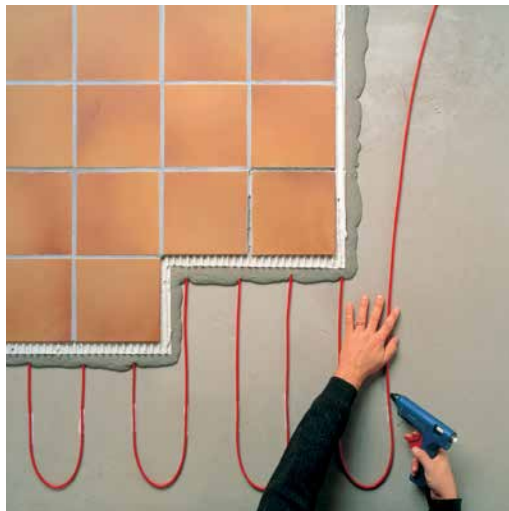

DESCRIPTION

T2Red is a self-regulating floor heating cable for low profile installations. Thanks to its self-regulating effect the cable can be applied under any type of floor surface without a risk on overheating. Especially in commercial rooms, with frequent interior changes, the T2Red heating cable is thinking along with the surface to be warmed and thereby providing a flexible solution to comfortable living.

This intelligent floor heating cable can be applied for improved living comfort in living and bedrooms, children's rooms and dining rooms, but also in bathrooms, kitchens and hall ways.

ADVANTAGES

The design phase

- Easy design: one heating cable for all room shapes
- Flexible planning and changeable interior design at all times
- Ideal for renovation due to the low profile (approximately 8 mm)
- Compatible with all stable subfloors e.g. concrete, anhydrite, asphalt, plaster, ceramic subfloor, wooden subfloors (with max. heat transfer resistance 0.15 m²K/W)
- Following floorings can be applied:

Tiles, marble, stones	Max. 30 mm thickness	λ-value 1.0 W/mK
Parquet	Max. 16 mm thickness	λ-value 0.14 W/mK
Carpet	Max. 10 mm thickness	λ-value 0.09 W/mK

The installation phase

- Heating cable is cut to length and therefore flexible to adapt to the room shape
- Heating cable can be spliced and crossed without risk of overheating
- No cold lead needed, easy connection

The application

- Flexible interior design. Due to the self regulating effect, there is no risk on overheating under carpets, furniture, etc.
- Automatic self-regulating output depending on environment (more output in cold zones e.g. door, less output in warm zone e.g. sunlight in green house)
- Extra low energy consumption with use of thermostat
- No measurable electro-magnetic fields due to the heating cable
- Long life and maintenance free

TECHNICAL DATA

Nominal power	5 W/m – 15 W/m (depending on floor covering)
Voltage	230 V
Max. Exposure Temperature	65°C
Min. Installation Temperature	+5°C
Max. Circuit Length	100 m
Dimensions	Approx. 8.7 mm x 6.0 mm
Min. Bending Radius	35 mm
Circuit Breaker	C10 A (T)
RCD	30 mA
Construction	PVC-free
Certificates	SEMKO, CE-mark

RELATED PRODUCTS

NRG-Temp	NRG-Temp Timer Thermostat Smart Timer Thermostat with many features including: <ul style="list-style-type: none"> • Standard comfort modes • Two economic programs EcoHome and EcoOffice • Energy saving features, such as the programming heating on time and the adaptive function • Ease of installation features, such as auto detection of sensing mode, auto calibration in room sensing mode and the first warming function
CE-T2Red	Connection and end seal kit for T2Red heating cables
S-T2Red	Splice kit for interconnecting T2Red heating cables
T2Reflecta pack	10 pc of T2Reflecta plates and 6 end plates

PACKAGING AND REFERENCE NUMBER

T2Red self-regulating heating cable on reels (various length min 16 m, max 300 m)
reference number: 948739-000

Needed accessories: CE-T2Red/ETL:
Connection and end seal kit for T2Red self-regulating cable
Reference number: 323608-000

Optional: T2Red pre-terminated
(T2Red incl. end seal, connection kit, thermostat NRG-Temp)

Product name	Power	Reference number
T2Red Pack 16 m Heating Cable	160 W	389736-000
T2Red Pack 23 m Heating Cable	245 W	658414-000
T2Red Pack 30 m Heating Cable	320 W	016962-000
T2Red Pack 37 m Heating Cable	400 W	066424-000
T2Red Pack 44 m Heating Cable	480 W	416966-000
T2Red Pack 58 m Heating Cable	640 W	531288-000
T2Red Pack 72 m Heating Cable	800 W	318684-000
T2Red Pack 86 m Heating Cable	960 W	275876-000
T2Red Pack 100 m Heating Cable	1120 W	036848-000

SUBFLOOR PREPARATION

The subfloor should be clean, stable and rigid, without cracks or adhesion-reducing substances.

Large cracks in the subfloor should be filled prior to laying the mat. Uneven surfaces will need to be levelled prior to installation. With cement plaster and anhydrite plaster, one should ensure that the substance has dried sufficiently according to the applicable norms. Anhydrite plaster should be smoothed and dust free. With quickly solidifying plaster, one should follow the suppliers instructions.

INSTALLATION INSTRUCTION

The heating cable should not be installed under bath tubs, shower cabins, surface covering furniture, etc.

The heating cable should not be installed where holes will be drilled in the floor. Applicable norms, rules and data sheets as well as instructions and manuals are to be followed!

For detailed installation instructions refer to INST214.



WWW.THERMAL.PENTAIR.COM

UNITED KINGDOM

Tel: 0800 969 013
Fax: 0800 968 624
salesthermaluk@pentair.com

IRELAND

Tel: 1800 654 241
Fax: 1800 654 240
salesie@pentair.com

All Pentair trademarks and logos are owned by Pentair. All other brand or product names are trademarks or registered marks of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer.

© 2013 Pentair. All Rights Reserved.